





**AZ Best, LLC**  
 PHONE: 602-882-5904  
 EMAIL: woody@azbestmaterials.com  
 WEB: azbestmaterials.com

4" PERFORATED DRAIN PIPE WITH FILTER FABRIC SOCK AND TOP CAP FOR WATERING DURING CONSTRUCTION, ESTABLISHMENT PERIOD, AND DRAINAGE INSPECTION.

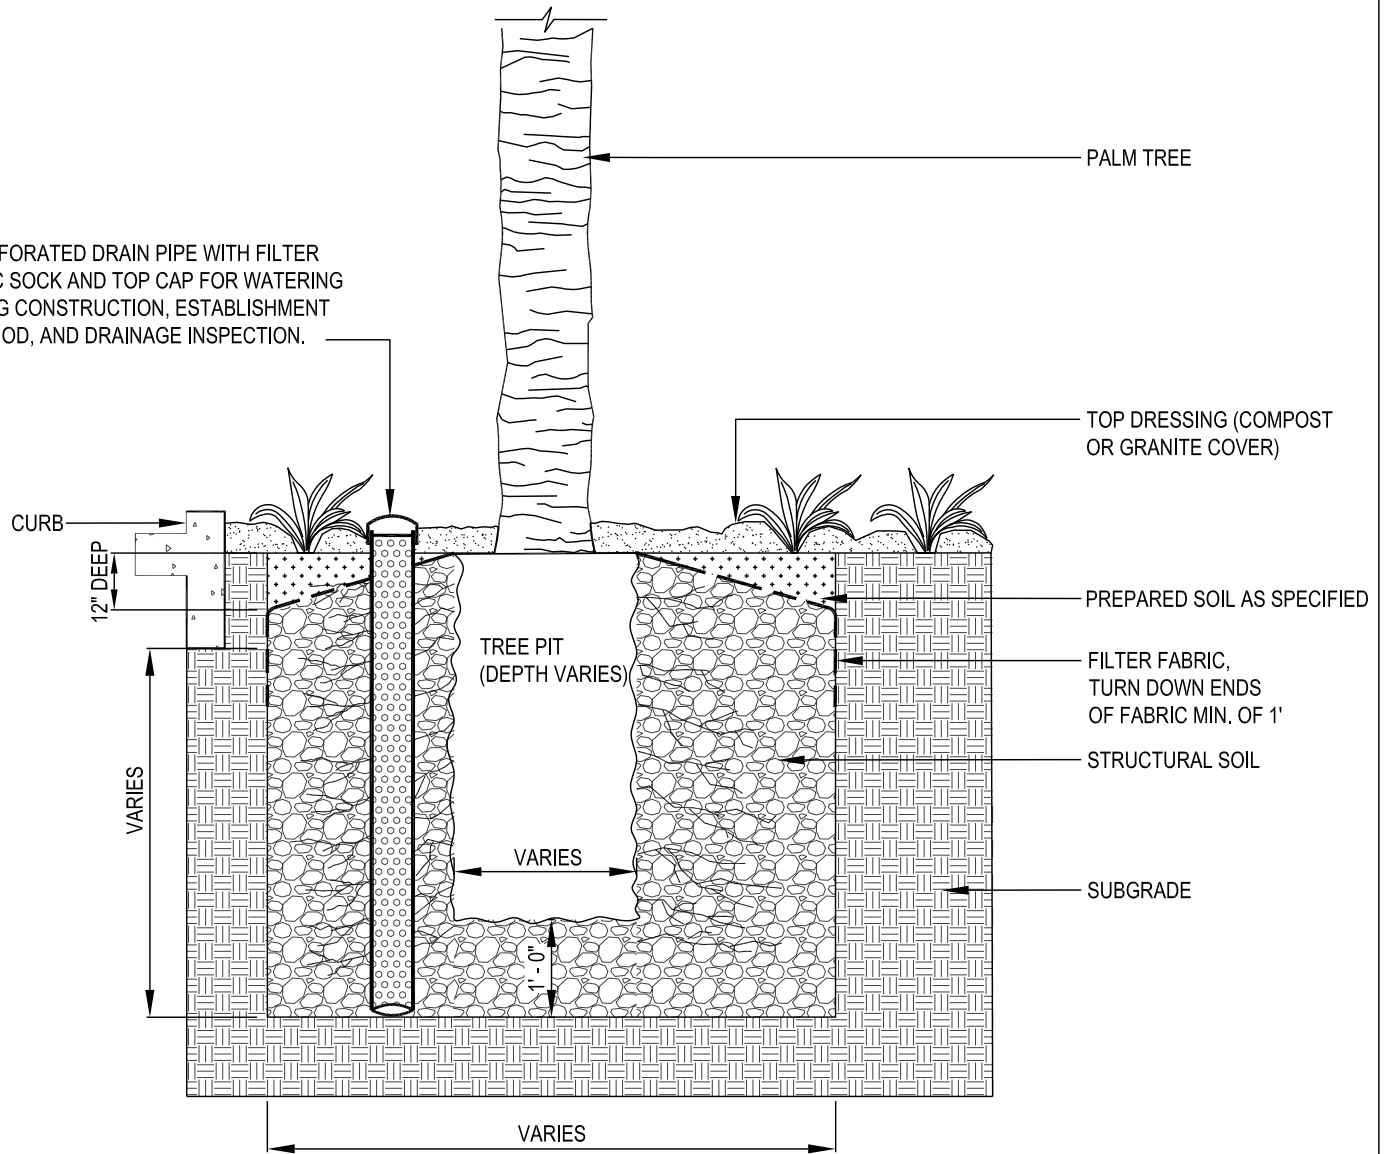

**NOTES:**

1. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
2. ALL PALMS TO BE STRAIGHT AND MATCHING IN HEIGHT AND CUT UNLESS MARKED.
3. PERFORM PERCOLATION TEST ON PLANTING PIT PER SPECIFICATIONS.
4. THERE ARE TO BE NO AERIAL ROOTS VISIBLE ABOVE GRADE.
5. THE PLANTING PIT SHALL NOT BE DEEPER THAN THE EXTENSION OF THE ROOTS.
6. INSTALL PROPER TREE BRACING & BLOCKING IF REQUIRED.
7. DO NOT APPLY WATER TO THE TOP OF STRUCTURAL SOIL UNLESS THE FILTER FABRIC & TOP DRESSING IS IN PLACE.
8. PROTECT STRUCTURAL SOIL FROM CONSTRUCTION ACTIVITIES UNTIL HARDSCAPE IS IN PLACE.
9. 4" PERFORATED PIPE CAN BE USED TO FLOOD PALM TREE PLANTING PIT DURING CONSTRUCTION, ESTABLISHMENT PERIOD, AND TO CONFIRM PROPER DRAINAGE OF THE PLANTING PIT.



**STRUCTURAL SOIL LARGE PALM TREE PLANTING W/ DETAIL**

VIEW #2 PLANTED IN SOFTSCAPE  
 NOT TO SCALE